


MIGHTY LITE 1000 (0402)

LIGHTWEIGHT, HIGH IMPACT DMX STROBE

Up TO 16 STROBES ON ONE 15-AMP CIRCUIT

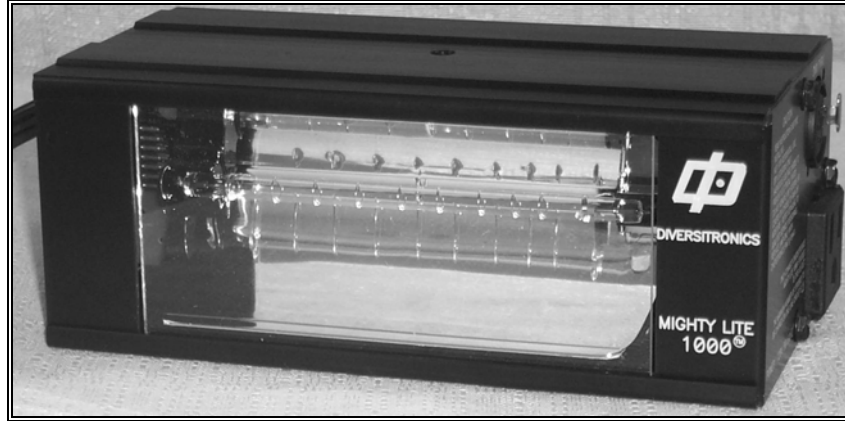

LEFT HAND INPUT



RIGHT HAND FEED THRU



FEATURES

- Input Flashes - 0 - 100%; Rates Up to 240 Flashes per Minute
See operating instructions for details.
- Emergency Vehicle Effect
- Flash Output - 250,000 Beam Candle Power
- Crisp, Clean, High-peak Capacitor Discharge
- Energy Efficient - Low Power Requirement - Less Than - 1 AMP per Unit
- Input & Thru Connectors for Control; Allows Daisy Chaining
- Single Channel DMX Control or Stand Alone; Dip Switch Sets DMX Channel
- 3-pin XLR Connectors
- Mounting - Top, Bottom & Rear of Unit (1/4" - 20 Threaded Holes)
- Operation - 120 Volt, 50/60 Hz ; also available in 220 Volt, 50/60 Hz
- Standards - Conforms to ANSI / UL 813 & UL 1573 / CSA
- Lamp Life - 50 Million Flashes

Lamp with Reflector - Part No. 6087

MECHANICAL

8" (20.3 cm) Wide X 3" (7.6 cm) High X 4" (10.3 cm) Deep X WEIGHT - 2 lbs. (.9 kg)